



**RECOMMENDED INSTALLATION GUIDELINES**

**FOR THE**

**DUCKBILL EARTH ANCHOR SYSTEM**



**FORESIGHT<sup>®</sup>**  
**PRODUCTS, LLC**

6430 East 49th Drive  
Commerce City, CO 80022 (USA)  
WATS: 1-800-325-5360  
TEL: 303-286-8955  
FAX: 303-287-3866  
WEB: [www.duckbill.com](http://www.duckbill.com)  
E-Mail: [sales@earthanchor.com](mailto:sales@earthanchor.com)

## INTRODUCTION

This guide serves to aid suppliers and installers of DUCKBILL<sup>®</sup> earth anchors about installation methods and techniques. DUCKBILL is offered in 4 Aluminum alloy anchor models and 3 galvanized ductile iron anchor models (for very hard / rocky soils). The anchors range in holding capacities in normal soil from 300 to 5000 lbs. (135 kg to 2250 kg) The DUCKBILL earth anchor has been developed to function in the total range of soils. Its design allows the installer much greater flexibility than other anchors offer. Installation details, tools and special soil conditions will be covered and should answer any questions that may arise. DUCKBILL anchoring systems offer an economic, lightweight solution to nearly any anchoring situation, big or small. Normally, wherever you can drive a stake or drill a hole, you can use a DUCKBILL anchor.

## THE DUCKBILL PRINCIPLE

The DUCKBILL anchor works very much like a toggle bolt. The anchor body is driven into the soil with a re-useable drive steel (drive rod). Once the anchor body is placed to the proper depth the drive steel is removed. A backward pull on the cable then rotates the anchor body in the ground until it is perpendicular to the cable. This is called anchor-locking the anchor. Because the DUCKBILL is driven into the earth, it is actually compacting the soil around it, not disturbing it. As the anchor is anchor-locked it cuts through the compacted soil into undisturbed soil and further compacts the soil above the anchor. As the soil above the anchor is compacted from below it forms an inverted cone of compact soil. This is called a cone of resistance. One of the most important features of the DUCKBILL anchoring concept is the ability to proof-test the anchor during normal installation. The anchor locking operation can be a proof-test of the anchor. By measuring the force required to anchor-lock the anchor the installer knows the actual holding capacity of the installation.



# SOILS

<u>CLASS</u>	<u>DISCRIPTION</u>	<u>PROBE VALUE</u>
1	<b>Solid Bedrock</b>	-----
2	<b>Dense Clay; Compact Gravel Dense Fine Sand; Laminated Rock; Slate; Schist; Sand Stone</b>	<b>Over 600 in./lbs</b>
3	<b>Shale; Broken Bedrock; Hardpan; Compact Gravel Clay Mixtures</b>	<b>500-600 in./lbs</b>
4	<b>Gravel; Compact Gravel and Sand; Claypen</b>	<b>400-500 in./lbs.</b>
5	<b>Medium-Firm Clay; Loose Standard Gravel; Compact Coarse Sand</b>	<b>300-400 in./lbs.</b>
6	<b>Medium-Firm Clay; Loose Coarse Sand; Clayey Silt; Compact Fine Sand</b>	<b>200-300 in./lbs</b>
7	<b>Fill; Loose Fine Sand; Wet Clays; Silt</b>	<b>100-200 in./lbs</b>
8	<b>Swamp; Marsh; Saturated Silt; Humus</b>	<b>Under 100 in./lbs</b>

Table provided by A.B. Chance

Anchor holding capacity will vary in the different classes of soils. More capacity can be expected in the numerically lower classes and less capacity in the higher number classes. Knowing the type of soil does not always mean that the class is known. For example, a clay material can have a class ranging from 4 to 8 depending on whether the material is very stiff to hard or soft to very soft. Water content will also affect classification. Similarly, cohesion less soils such as sands and gravels have a wide range depending upon the density or compactness of the material.

There are various ways of testing soils. A torque probe is the best for quick classification in the field. Core samples are the best for detailed classification but are expensive and take time to obtain the test results. Generally resistance to driving the DUCKBILL is a good “seat of the Pants” indicator of soil class. Stiff resistance will normally result in positive anchoring. If the anchor drives very easily, the soil is soft and steps should be taken to assure adequate capacity such as using a larger DUCKBILL anchor. Keep in mind that simple anchor-locking will verify the capacity of the anchor in any soil class.

**This is recommended when a specific holding capacity is required.**

# Duckbill Earth Anchors

## Holding Capacity

<u>Duckbill Model</u>	<u>Ultimate Capacity</u>	<u>Normal Soil*</u>	<u>Normal Installation Depth</u>
<b>40</b>	580 lbs ( 261 kg )	300 lbs (135 kg )	20 inches (.5m )
<b>68</b>	2,045 lbs ( 920 kg )	1,100 lbs ( 495 kg )	30 inches (.75m )
<b>88</b>	6,180 lbs ( 2,781 kg )	3,000 lbs ( 1,350 kg )	42 inches ( 1.05m )
<b>138</b>	10,670 lbs ( 4,802 kg )	5,000 lbs ( 2,250 kg )	60 inches ( 1.5 m )

- Typical Blow Count Per ASTM-D1586. Normal Soil Blow Count Range 24-40.
- Common Soil Type – Dense Fine Sand; Very Hard Silts and Clays; Dense Clays; Sands; and Gravel; Hard Silts and Clays.



6430 East 49th Drive  
 Commerce City, CO 80022 (USA)  
 WATS: 1-800-325-5360  
 TEL: 303-286-8955  
 FAX: 303-287-3866  
 WEB: www.duckbill.com  
 E-Mail: sales@earthanchor.com

The anchors are rated in an average (class 5) soil condition. Again, higher capacities can be expected in harder soils and lower capacities in softer soils. The rating is mainly useful as a reference for anchor selection. Proof-loading is the only way to insure the exact capacity of each installation. This is true for all anchors on the market today.

## INSTALLATION

The first step in any installation is to select the proper anchor for the job. Keep in mind the maximum load expected and add a reasonable safety factor.

### Aluminum Anchors



MODEL 138



MODEL 88



MODEL 68



MODEL 40

### Galvanized Ductile Iron Anchors



MODEL 138-DI



MODEL 88-DI



MODEL 68-DI

## DRIVING THE ANCHOR

The DUCKBILL® can be driven at any angle. In guy applications the angle of the installation should closely match the angle of the guy line. Start by inserting the drive steel into the anchor body. Use a sledge hammer, fence post driver or a power driven jack-hammer to drive the anchor to the proper depth. Fill hole made by anchor with soil. This will not allow water to seep down to the anchor.



HAND INSTALLATION



MECHANICAL INSTALLATION



## MECHANICAL ANCHOR LOCKING

After the anchor has been driven to depth, the drive steel is retracted from the anchor. Pull back on the anchor cable to toggle the anchor into the perpendicular (anchor-locked) position. In average soils a rule of thumb is that the length of pull should equate to the length of the anchor. For example: Model 88 anchor body measures 6” inches. A pull of 5-6” will rotate the anchor into a completely perpendicular position. Several methods are used to anchor lock the anchors.



## HAND ANCHOR LOCKING

The smaller DUCKBILL models may be locked by hand. Insert the drive steel through the cable loop or wrap the cable around the drive steel to fashion a “T” handle. Pull on the drive steel to anchor-lock the anchor. A fulcrum is also very useful in locking anchors by hand. The DUCKBILL “hand hook” is also available.



LOCKING WITH DRIVE STEEL



LOCKING WITH HAND HOOK


## JACKS

Ordinary automotive bumper jacks or handyman jacks work well on medium and larger sized anchors. By adding legs to the jack to form a tri-pod angled pulls are achieved with greater ease.




## HYDRALIC JACK

The LL-2 Anchor locker is designed to load lock and test the full line of DUCKBILL anchors. It is manually operated and has a maximum capacity of 8000 lbs. (36 kg)

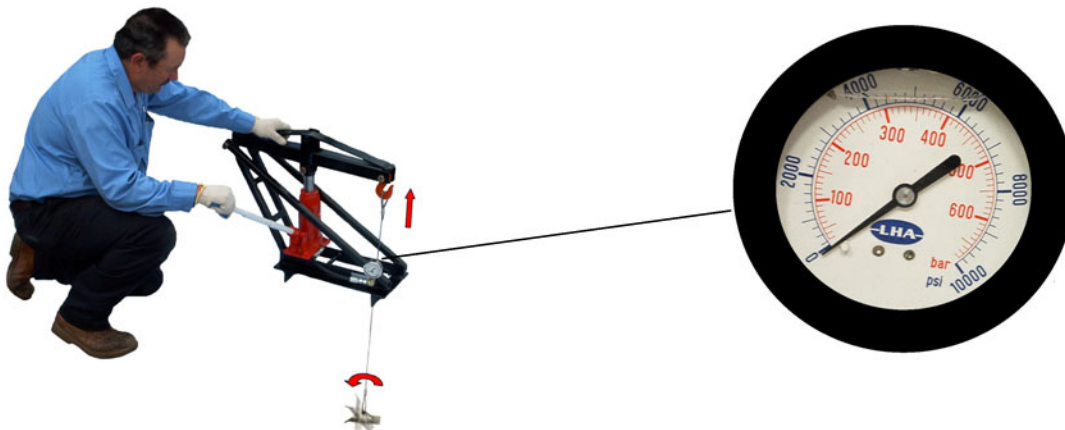

## CENTER HOLE HYDRAULIC CYLINDERS

Although a specialized piece of equipment, the center hole hydraulic cylinder is a very good tool for someone who will install many anchors on a regular basis. Being small and light-weight they are ideal for horizontal installations. A hydraulic pressure gauge often accompanies this set-up so that every installation may be checked for capacity. (proof loading)

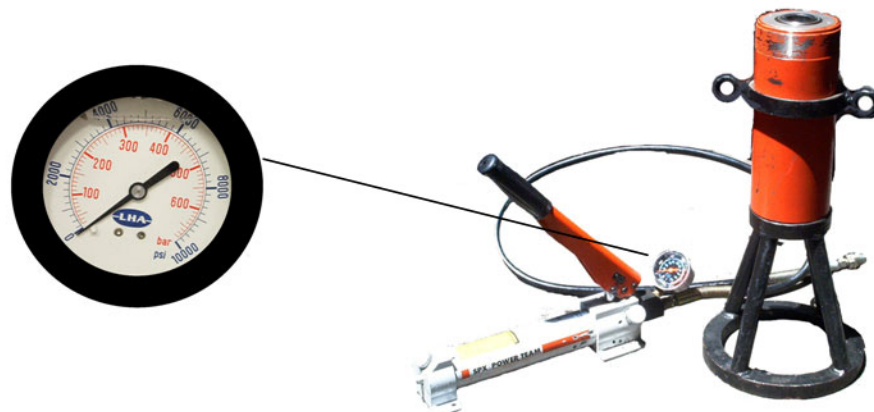

**NO MATTER WHAT METHOD IS USED, IT IS CRITICAL THAT THE ANCHOR BE PROPERLY LOCKED BEFORE TYING OFF THE OBJECT TO BE ANCHORED.**


An anchor not properly locked prior to attaching will result in significant pull out before the anchor self locks. Obviously this is not desired.

Failure to install and lock the anchor at the correct angle will result in the anchor cable cutting through the soil until the angles equalize. This will cause slack in guylines, also not desired.

**SPECIAL SOILS CONSIDERATIONS**

**SOFT SOILS**

In areas where the soil proves to be softer than normal, steps should be taken to assure the capacity of the anchor. Proof-loading is especially useful in soft soils. Guesswork as to the capacity is eliminated. The installer will know immediately if the anchor point is adequate or if further steps are necessary. Backfilling and tamping the hole behind the anchor will yield somewhat higher capacity in most soft soils. Fill and tamp the hole in 3" lifts prior to anchor locking the anchor. Another option is to drive the anchor deeper in an effort to penetrate a harder layer of soil. Larger anchors may need to be placed to achieve the required load. As a last resort a number of anchors may be placed in a cluster and bridled together to form one point.

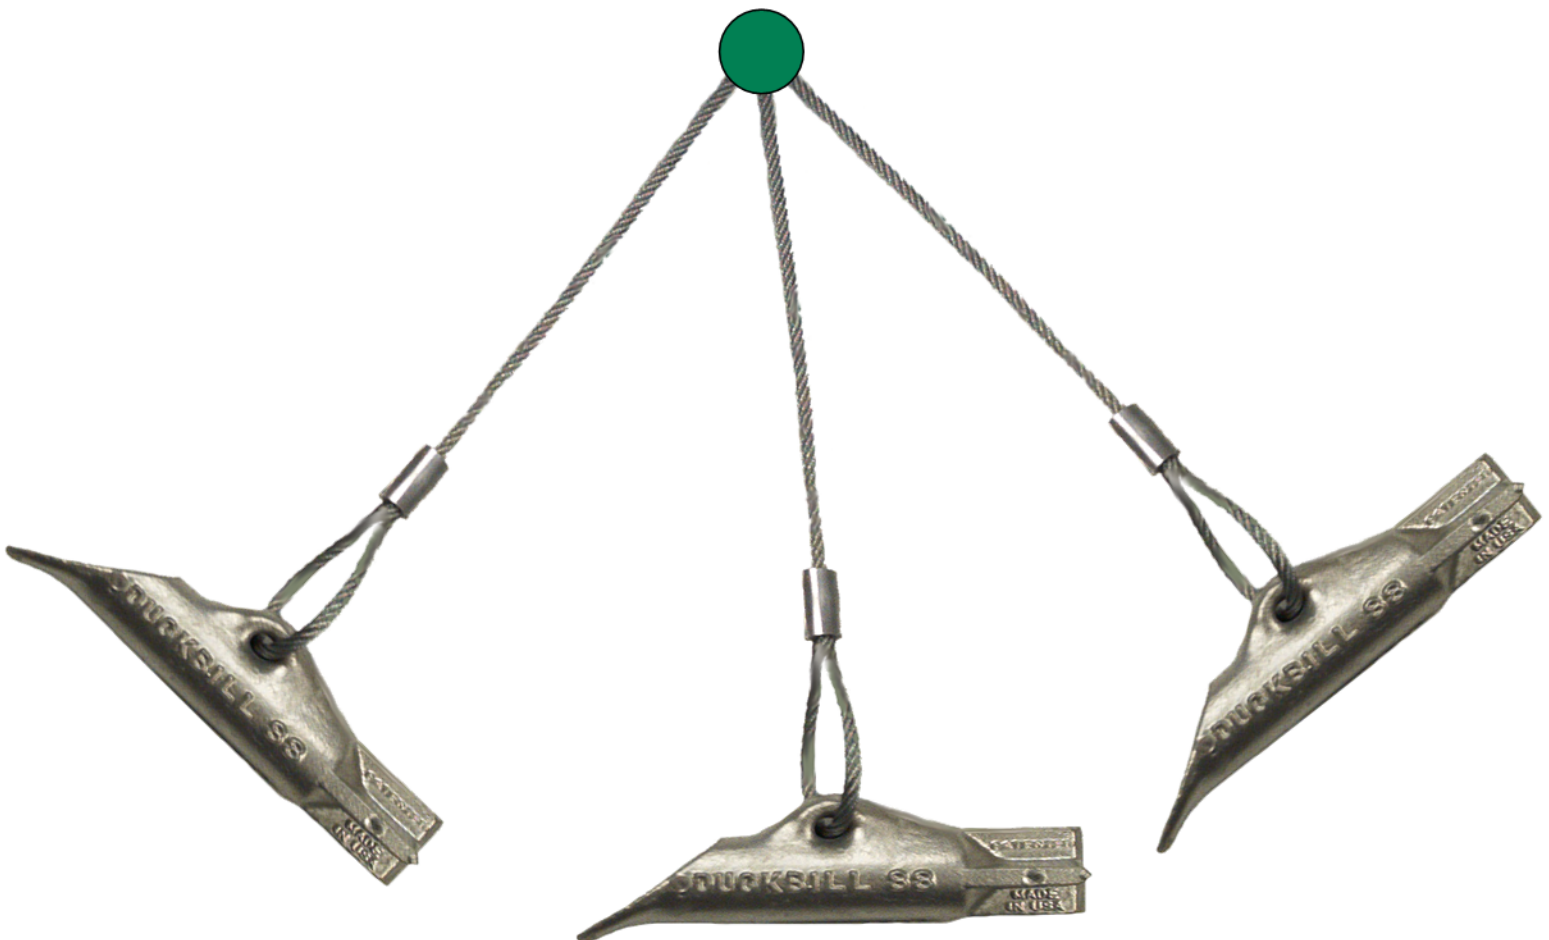



## **HARD SOILS AND ROCK**

If excessive resistance to driving occurs it may be necessary to drill a hole for anchor placement. If the anchor stops moving and is subjected to excessive pounding (especially from power equipment) metal fatigue can occur and the anchor body can fracture. The DUCK-BILL<sup>®</sup> anchor may be placed in a pre-drilled hole in hard dirt or rocky material, and achieve very good results. Hand augers and gasoline or hydraulic powered earth drills can be used to form the hole. A gasoline powered breaker/drill is very useful due to the fact that it performs both drilling and driving operations.



### **CLEARANCE HOLE DIAMETERS**

**&**

### **HARD SOIL PILOT HOLE DIAMETERS FOR DUCKBILL<sup>®</sup> EARTH ANCHORS**

INSTALLATION OF DUCKBILL ANCHORS IN HARD SOILS CAN BE GREATLY HELPED BY THE USE OF A PILOT HOLE. TYPICALLY, THE PILOT HOLE HAS NO SIGNIFICANT AFFECT ON THE HOLDING POWER OF THE ANCHOR. THERE ARE MANY ACCEPTABLE METHODS OF DRILLING PILOT HOLES AND MANY MANUFACTURES OF EQUIPMENT TO DO SO. RECOMMENDED HARD SOIL PILOT HOLE DIAMETERS AND CLEARANCE HOLE DIAMTERS ARE CHARTED BELOW.

<b>MODEL</b>	<b>CLEARANCE HOLE DIAMETER</b>	<b>MINIMUM PILOT HOLE DIAMETER FOR HARD SOIL</b>
<b>40-DB</b>	1.0"	0.75"
<b>68-DB</b>	1.50"	1.25"
<b>88-DB</b>	2.25"	2.00"
<b>138-DB</b>	2.75"	2.50"